




## **Focus® II**

### Compact Autoscrubbers®

- 3 models to choose from
- Superior solution clean up
- Quiet operation at 65.8 dB A
- Easy operation
- Environmentally friendly

The Focus II models are the first 20 in. autoscrubbers available with Clarke's revolutionary BOOST® Technology. If you demand high levels of cleaning with the ultimate in green benefits, BOOST technology offers 70% reduction in water and chemicals, 40% increase in pad life, and an added benefit of chemical-free removal of floor finish, compared to traditional disc models.

No other manufacturer comes close to matching Clarke's combination of serious cleaning ability and green benefits in autoscrubbers. The Focus II models are also available in 2 disc models. And all of the Focus II scrubbers feature important benefits such as low noise levels, improved user ergonomics, onboard chargers, breakaway squeegees and more.

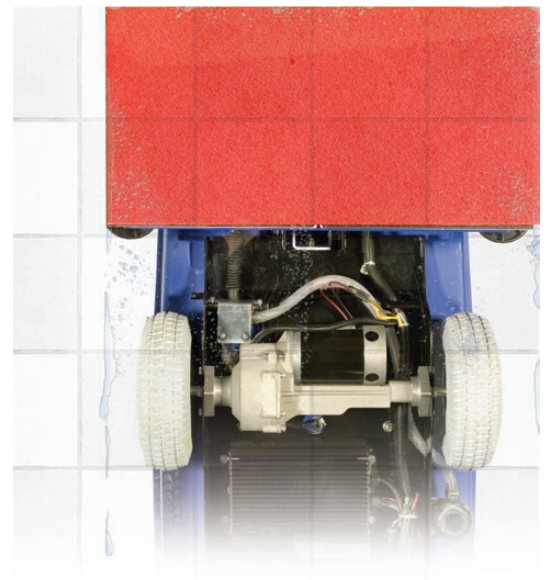

The Focus II Compact BOOST features high speed orbital action and agitation.

**Trusted. Reliable. Efficient.**

**A Nilfisk-Advance Brand**

# **Clarke®**



## **800.440.6723**

**[www.southeasternequipment.net](http://www.southeasternequipment.net)**

# The Clarke Focus II Has 3 Models Available!

The L20 BOOST Orbital, S20 and L20 Disc to fill all application needs

## BOOST Orbital



### Focus II - BOOST L20

BOOST technology produces high speed agitation with small 1/4 in. orbits. The orbital scrubbing action cleans 6x more effectively than traditional disc scrubbers. That means not only chemical-free removal of floor finish\*, but huge cost and labor savings every day: up to 70% less water usage and chemical costs, 50% less dump-and-fill time, and 40% longer pad life!

\*using maroon prep pad



## 2 Disc Models



### Focus II S20 with Brush Assist Traverse L20 with Power Traverse

Conventional disc models of the Focus II are available with a 20 inch disc scrub deck. They may be selected with either power traction or brush assist drive. The brush/pad driver installation and removal is made simple with an easy on/off push button control.



The high speed agitation of BOOST not only has superior cleaning performance, but also wet shines the floor to reduce burnishing requirements.



Easy access to battery compartment is great for maintenance and installation. Choose either 130 AH wet or 114 AH AGM batteries.



One-touch control panel is simple and effortless to operate. Ergonomically placed controls for all functions.



Rugged Polydur® tanks withstand impact and resists chemical damage

Large opening aids in clean out of recovery tank

Convenient front and rear fill

Powerful 3/4 HP motor drives the high speed orbital agitation of the BOOST model

Large diameter, non-marking wheels provide high traction

Clarke's patented pulse solution control applies an accurate and conservative amount of solution

## Very Quiet - Only 65.8 dB A

Two scrub decks to choose from to fit your application: 20 in. BOOST and 20 in. disc. As shown with BOOST.



Recovery drain is located high on the machine to allow draining into a high deep sink or toilet

Solution level indicator is conveniently located for the operator

Emergency power disconnect

Onboard battery charger allows charging at any convenient electrical outlet

The solution tank fill is conveniently located on the rear of the machine for ease of filling while draining the recovery tank

Squeegee is easy to remove without tools, and breaks away upon impact to prevent damage. Polyurethane front and rear blades wear longer and resist chemicals. Blades easily index without the use of tools.





SPECIFICATIONS	S20	L20	BOOST L20
Part Number	See price catalog for part numbers		
Scrub Head Type	Disc	Disc	BOOST
Cleaning Width	20 in	20 in	20 in
Drive Type	Drive Assist	Power Traction	
Working Voltage	24 V DC		
Standard Batteries (2)	12 V 130 Ah @ 20 hr rating (wet) or 12 V 114 Ah @ 20 hr rating (AGM)		
Battery Protection System	Low voltage cut-off of brush and solution		
Vacuum Motor Power	0.5 hp, 2-stage tangential discharge		
Solution & Recovery Tank	14.5 gal		
Solution Flow	0 - 0.63 gal/min		0 - 0.3 gal/min*
Brush Motor Power	0.7 hp (480 W)		0.75 hp (560 W)
Brush Pressure	45 & 90 lb		40 & 75 lb
Disc, Pad, Brush Sizes	20 in		14 x 20 in
Brush Speed	153 RPM		2,250 RPM
Sound Level	65.8 dB A		
Onboard Charger	Standard		
Dimensions	52 in x 29 in x 42 in		51 in x 29 in x 42 in
Width (without squeegee)	21 in		20 in
Squeegee Width	29.9 in		
Agency Approval	cETLus		

\*BOOST normal operating flow rate is 0.1 gal/min. Specifications are subject to change without notice.



### What enhances its productivity?

- Efficient utilization of solution
- Compact design, large capacity
- Easy on/off brush
- Long run times
- Solution and brush off in neutral

### What makes it "green"?

- Low sound level
- Ergonomic design

- AGM battery (optional)
- Chemical-free floor finish removal with BOOST® Technology

### What are the safety features?

- Security key switch
- Safety yellow palm switches
- Circuit breaker protection

### What are the accessories?

- Full line of brushes and pads
- Battery Maintenance System
- Replacement Squeegee Blade Kit
- Hour meter kit



# Clarke®

[www.clarkeus.com](http://www.clarkeus.com)